

## 1x2 Solid-State Fiberoptic Switches



ACP's SW Series switch connects optical channels by redirecting an incoming optical signal into a selected output fiber. This is achieved using patent pending non-mechanical proprietary configurations and activated via an electrical control signal. The solid-state operation offers ultra-high reliability and fast switching speed as well as bi-directional performance. The SW fiberoptic switches are true switching solutions for optical networking applications.

### Key Features

- Fast Switching Speed
- Ultra-High Reliability
- Latching
- Highly Repeatability
- Low Cost


### Applications

- Optical Network Protection/Restoration
- Optical Signal Routing
- Configurable Optical Add/Drop
- Transmitter and Receiver Protection
- Network Test Systems
- Instrumentation

### Performance Specifications

Parameter	Specifications	
	Unidirectional	Bidirectional
Operating Wavelength	1525nm to 1565nm, or custom wavelengths	
Insertion Loss	≤ 1.1dB	≤ 1.3dB
Polarization Dependent Loss	≤ 0.2dB	
Polarization Mode Dispersion	≤ 0.2ps	
Channel Cross Talk	≥ 40dB	≥ 35dB
Return Loss	≥ 40dB	≥ 30dB
Repeatability	± 0.01dB	
Switching Speed	200µs to 400µs, (50µs speed optional)	
Durability (Cycles)	10 Million	
Optical Power	500mW	
Switching Type	Latching	
Operating Temperature	-5 to +70°C	
Storage Temperature	-40 to +85°C	
Package Dimensions	L39mm x W9.0mm x H9.5mm	

## Mechanical Dimensions

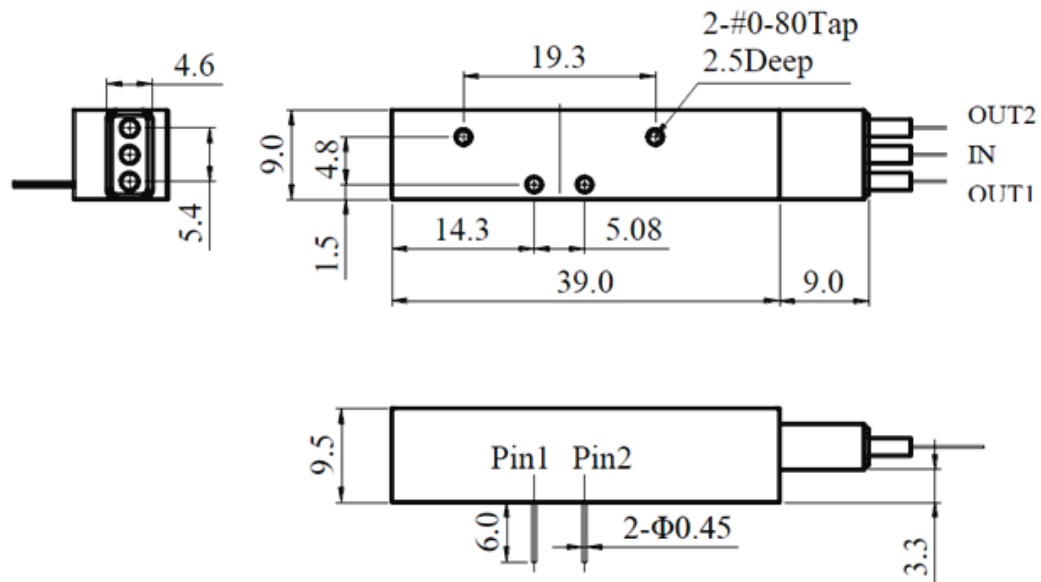








## Electrical Pin Configuration

Parameter	Specifications	
	Switching Speed	200 to 400 $\mu$ s
Switching Voltage (Vcc)	5 $\pm$ 5%V	6 to 7V
Switching Current	< 200mA	< 350mA
Pulse Width (typical)	1000 $\mu$ s	20 $\mu$ s
Claim Frequency	< 800Hz	< 3000Hz

## Pin Configuration

Pin1	Pin2	Optical Path
1(Voltage=VCC)	0(Voltage=GND)	IN to OUT1
0(Voltage=GND)	1(Voltage=VCC)	IN to OUT2
1(Voltage=VCC)	0(Voltage=GND)	OUT2 to IN
0(Voltage=GND)	1(Voltage=VCC)	OUT1 to IN

## Ordering Information

SW							
	Direction	Operating Wavelength	Port	Switching Speed	Pigtail Style	Fiber Length	In/Out Connector
	U = Unidirectional B = Bidirectional	15 = 1550 ± 50nm	0102 = 1x2	1 = 200 to 400µs 2 = 10 to 30µs	1 = Bare Fiber 2 = 900um Jacket	1 = 1.0m 2 = 2.0m	0 = None 1 = FC/APC 2 = FC/PC 3 = SC/APC 4 = SC/PC 5 = ST 6 = LC/UPC 7 = LC/APC